

DUAL LOW-NOISE OPERATIONAL AMPLIFIERS(DUAL POWER SUPPLY TYPE)**DESCRIPTION**

The M5219 is a semiconductor integrated circuit designed for a preamplifier in audio equipment of stereo and cassette tape decks.

Two low-noise operational amplifier circuits displaying internal phase-compensated high gain and low distortion are contained in a 8-pin SIP, DIP or FP, suitable for application as an equalizer and tone control amplifier of stereo equipment and cassette tape decks.

The unit can also be used as a general-purpose amplifier in portable equipment such as a stereo cassette tape recorder of a single power supply type as it operates at a low supply voltage.

FEATURES



- Low noise $V_{NI}=0.9\mu V_{rms}$ typ. ($R_g=2.2k\Omega$, RIAA)
S/N=77dB typ. (Shorted input, IHF-A network)
(RIAA, PHONO=2.5mVrms)
- High voltage $V_{CC}=\pm 25V(50V)$
- Low PHONO maximum input voltage
..... $V_i=230mV_{rms}$ (typ.)
($V_{CC}=\pm 22.5V$, $f=1kHz$)
- High gain, low distortion
..... $G_{VO}=110dB$, THD=0.001% (typ.)
- High slew rate $SR=6.5V/\mu s$ (typ.)
- High load current, high power dissipation
..... $I_{LP}=\pm 50mA$, $P_d=800mW$ (SIP)
 $P_d=625mW$ (DIP), $P_d=440mW$ (FP)

APPLICATION


General-purpose preamplifier in stereo equipment, tape decks and radio stereo cassette recorders.

RECOMMENDED OPERATING CONDITIONS

- Supply voltage range $\pm 2 \sim \pm 22.5V$
Rated supply voltage $\pm 22.5V$

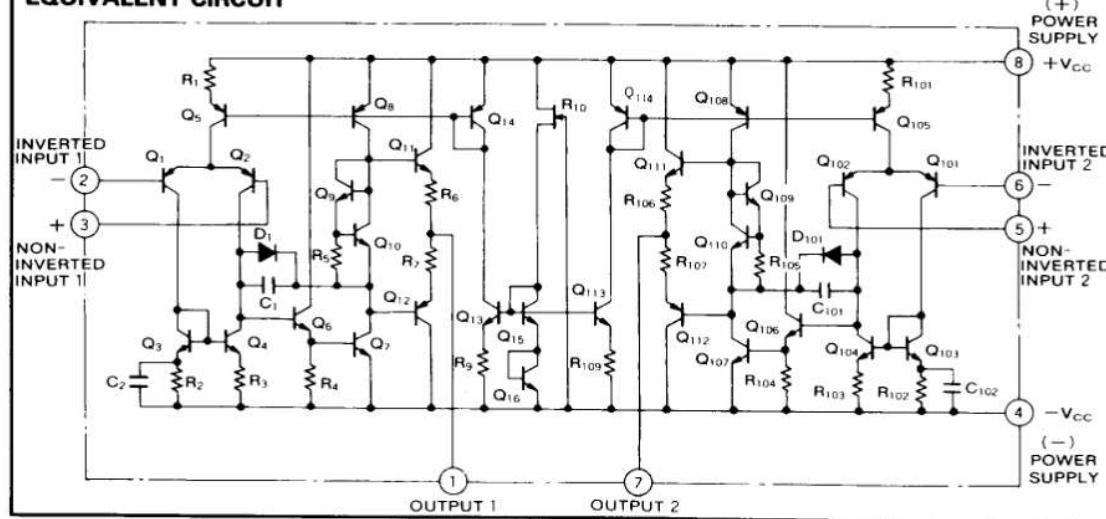EQUIVALENT CIRCUIT**PIN CONFIGURATION (TOP VIEW)**

Outline 8P5 (M5219L)

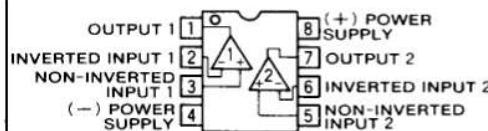Outline 8P4 (M5219P)
8P2S (M5219FP)

DUAL LOW-NOISE OPERATIONAL AMPLIFIERS(DUAL POWER SUPPLY TYPE)

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$, unless otherwise noted)


Symbol	Parameter	Conditions	Ratings	Unit
V_{CC}	Supply voltage		$\pm 25(50)$	V
I_{LP}	Load current		± 50	mA
V_{id}	Differential input voltage		± 30	V
V_{ic}	Common input voltage		± 22.5	V
P_d	Power dissipation		800(SIP)/625(DIP)/440(FP)	mW
K_θ	Thermal derating	$T_a \geq 25^\circ\text{C}$	8(SIP)/6.25(DIP)/4.4(FP)	mW/°C
T_{opr}	Ambient temperature		-20~+75	°C
T_{stg}	Storage temperature		-55~+125	°C

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$, $V_{CC}=\pm 22.5$ V)


Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
I_{CC}	Circuit current	$V_{in}=0$		3.5	7.0	mA
V_{IO}	Input offset voltage	$R_s \leq 10\text{k}\Omega$		0.5	6.0	mV
I_B	Input bias current			0.3		μA
G_{VO}	Open loop voltage gain	$f=100\text{Hz}, R_L=47\text{k}\Omega, C_{NF}=470\text{ μF}$	90	110		dB
V_{OM}	Maximum output voltage	$f=1\text{kHz}, THD=0.1\%, R_L=47\text{k}\Omega, \text{RIAA}$	12.5	14.0		Vrms
THD	Total harmonic distortion	$f=1\text{kHz}, V_O=5\text{Vrms}, R_L=47\text{k}\Omega, \text{RIAA}$	0.001	0.03		%
V_{NI}	Input referred noise voltage	$R_g=2.2\text{k}\Omega, BW=10\text{Hz} \sim 30\text{kHz}, \text{RIAA}$	0.9	1.8		μVrms
S/N	Signal-to-noise ratio	Shorted input ($R_g=47\Omega$), IHF-A network PHONO=2.5mVrms, RIAA		77		dB

TEST CIRCUITS


(a) I_{CC} , V_{IO}

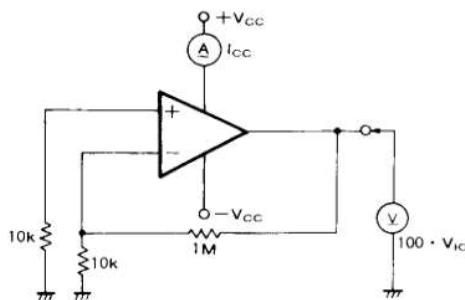

(b) G_{VO}

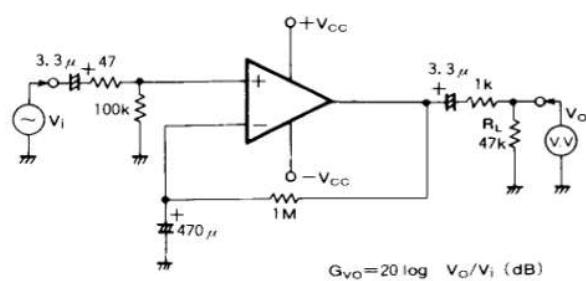


(c) V_{OM} , THD

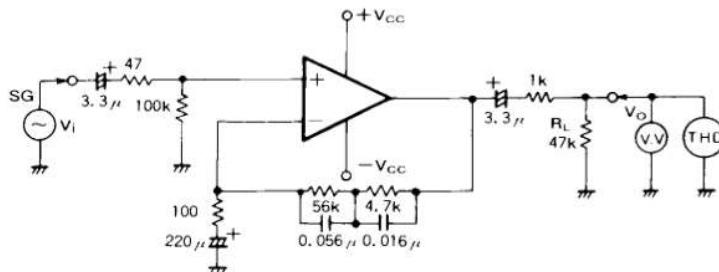

Unit Resistance : Ω
Capacitance : F

DUAL LOW-NOISE OPERATIONAL AMPLIFIERS(DUAL POWER SUPPLY TYPE)

TEST CIRCUIT

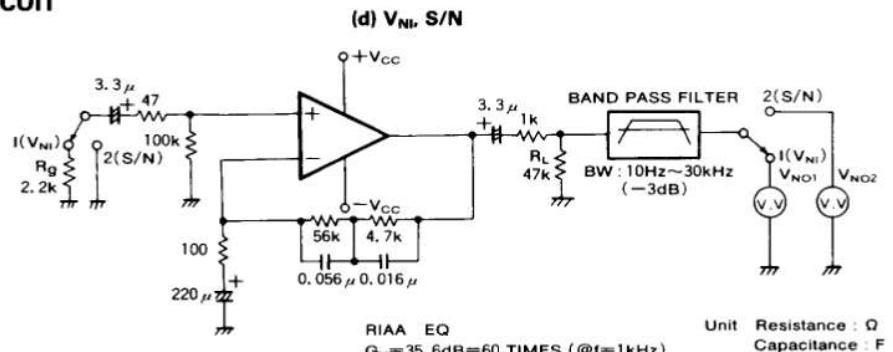


1. $V_{NI}=V_{NO1}/60(\mu V_{rms})$
2. $S/N=20 \log(2.5mV_{rms}/(V_{NO2}/60))$ (dB)


An AC voltmeter $V.V$ with a built-in IHF-A network filter should be used for measuring the S/N ratio.

TYPICAL CHARACTERISTICS


**THERMAL DERATING
(MAXIMUM RATING)**

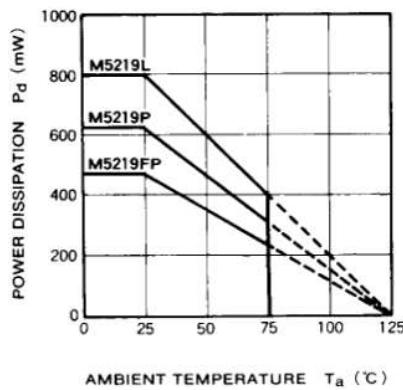


**VOLTAGE GAIN VS.
FREQUENCY RESPONSE**

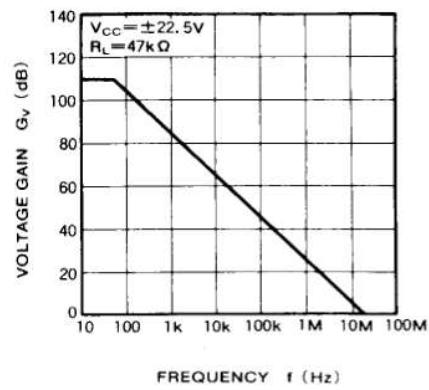

**CIRCUIT CURRENT VS.
SUPPLY VOLTAGE**

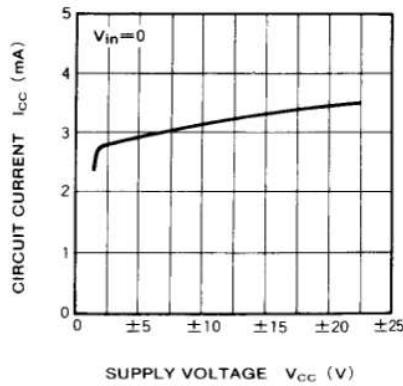


**CIRCUIT CURRENT VS.
AMBIENT TEMPERATURE**

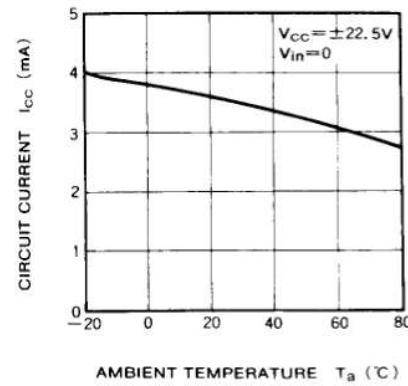

DUAL LOW-NOISE OPERATIONAL AMPLIFIERS(DUAL POWER SUPPLY TYPE)

APPLICATION EXAMPLES

(1) Stereo equalizer amplifier circuit

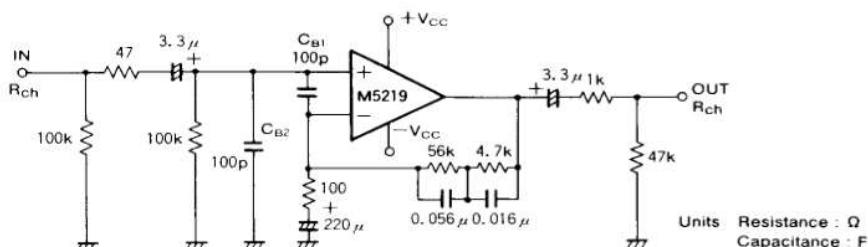





TYPICAL CHARACTERISTICS ($V_{CC} = \pm 22.5V$, RIAA)

- $G_v = 35.6\text{dB}(f=1\text{kHz})$
- $V_{NI} = 0.9\mu\text{VRms}$ ($R_g = 2.2\text{k}\Omega$, BW = 10Hz~30kHz)
- S/N = 77dB (IHF-A network, shorted input, 2.5mVrms input sensitivity)
- THD = 0.001% ($f = 1\text{kHz}$, $V_o = 5\text{Vrms}$)

L_{ch} circuit constants are identical to those of R_{ch}


C_{B1}, C_{B2} : Capacitors for buzz prevention, use if required.

R_O : Resistor used to prevent parasitic oscillation for capacitive loads and current limiting with shorted and other abnormal load conditions.

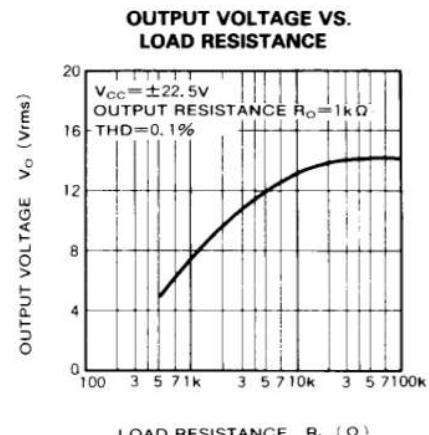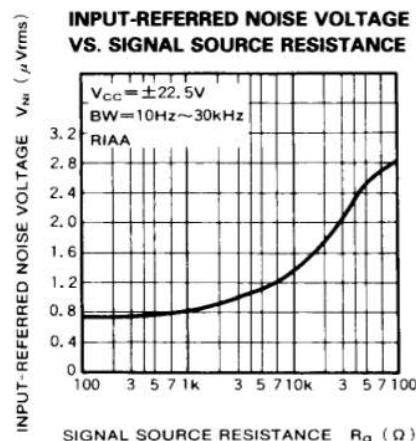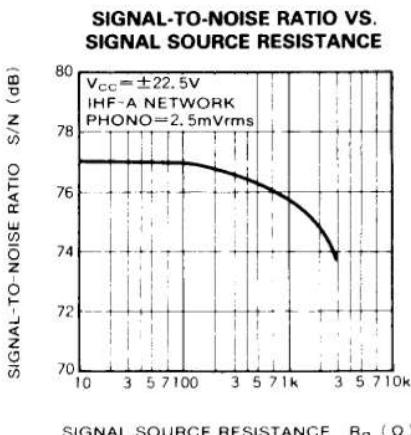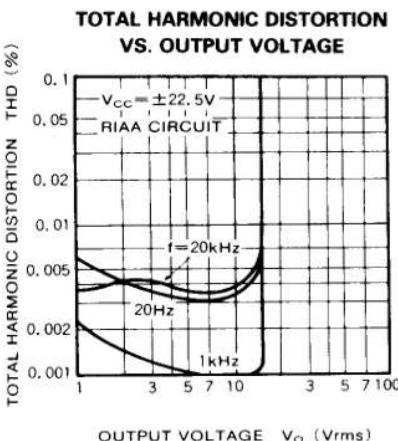


DUAL LOW-NOISE OPERATIONAL AMPLIFIERS(DUAL POWER SUPPLY TYPE)


OUTPUT VOLTAGE VS.
SUPPLY VOLTAGE

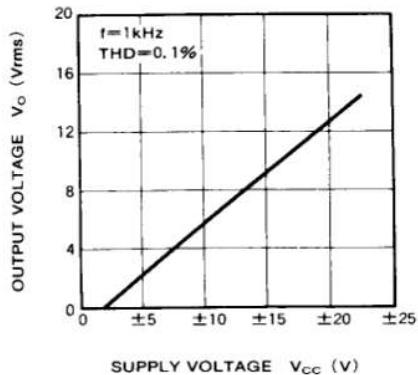

HUM REJECTION VS. FREQUENCY

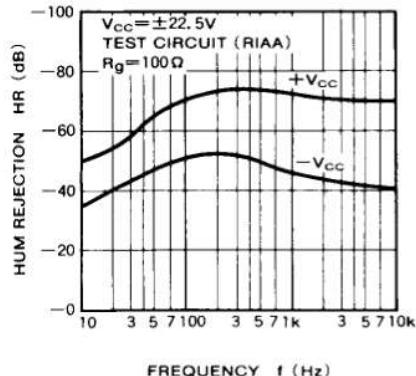

(2) High S/N stereo DC ICL equalizer circuit

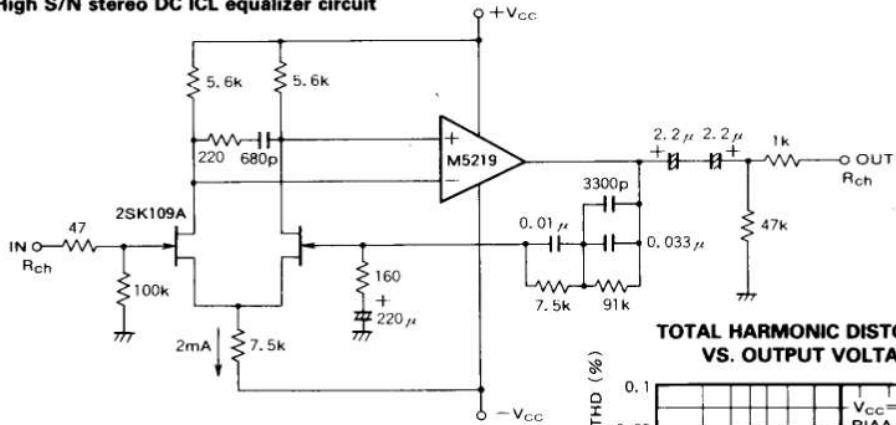


L_{ch} circuit constants are identical to those of R_{ch}.

Units Resistance : Ω
Capacitance : F


- TYPICAL CHARACTERISTICS** ($V_{cc}=\pm 22.5\text{V}$, RIAA)
- S/N=85dB(IHF-A network, shorted input, 2.5mVrms input sensitivity)
 - $V_{NI}=0.77\mu\text{Vrms}$ ($R_g=5.1\text{k}\Omega$, BW=5Hz~100kHz)
 - $G_v=35.6\text{dB}$ ($f=1\text{kHz}$)

TOTAL HARMONIC DISTORTION VS. OUTPUT VOLTAGE

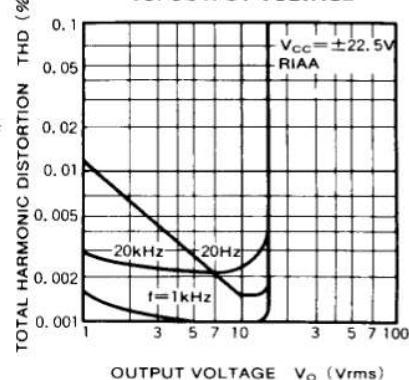

DUAL LOW-NOISE OPERATIONAL AMPLIFIERS(DUAL POWER SUPPLY TYPE)


(3) Tape deck equalizer amplifier circuit

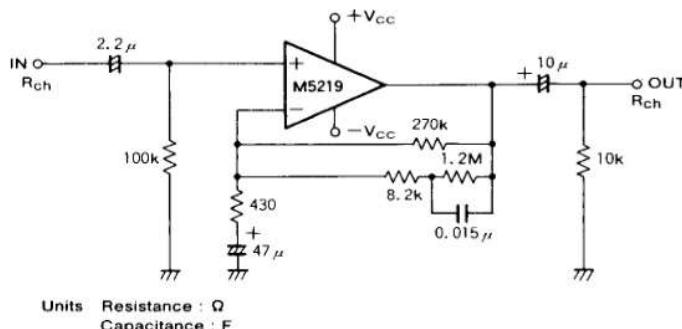

R_{ch} circuit constants are identical to those of R_{ch} .


TYPICAL CHARACTERISTICS ($V_{CC} = \pm 15V$, NAB)

- $G_V = 29.9 \text{ dB}(f=1\text{kHz})$
- $V_{NI} = 1.4 \mu\text{Vrms}$ ($R_g = 2.2 \text{ k}\Omega$, BW = 20Hz~15kHz)
(-117dBv)

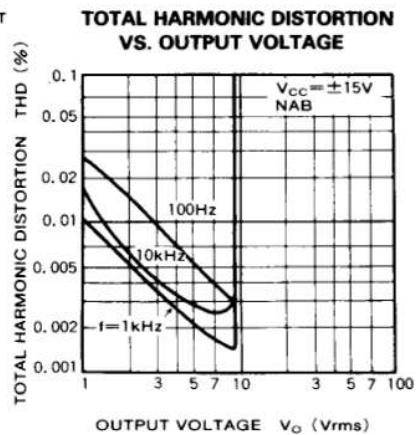

(4) Typical single power supply application

PHONO EQUALIZER AMPLIFIER (RIAA)

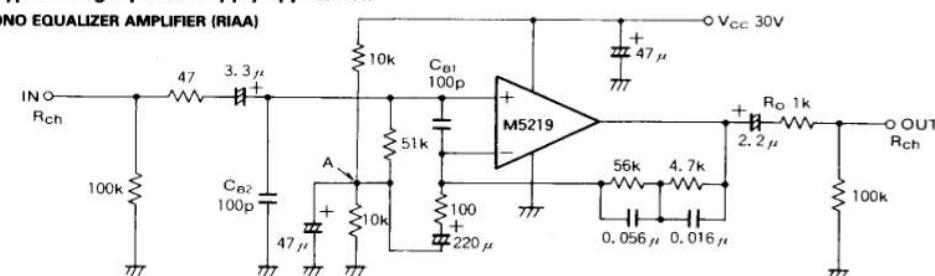

TYPICAL CHARACTERISTICS ($V_{CC} = +30V$, RIAA)

- $G_V = 35.6 \text{ dB}(f=1\text{kHz})$
- $V_{NI} = 0.9 \mu\text{Vrms}$ ($R_g = 2.2 \text{ k}\Omega$, BW = 10Hz~30kHz)
- S/N = 77dB (IHF-A network, shorted input, 2.5mVrms input sensitivity)

- → Point A is the $V_{CC}/2$ point in DC terms (virtual ground) when the device is used as a single power supply type.
- C_{B1}, C_{B2} : Capacitor for buzz prevention, use if required.
- R_O : Resistor used to prevent parasitic oscillation for capacitive loads and current limiting with shorted and other abnormal conditions.

