

isc Silicon NPN Power Transistor

2SD581

DESCRIPTION



- Collector-Emitter Breakdown Voltage-  
:  $V_{(BR)CEO} = 100V(\text{Min.})$
- Collector-Emitter Saturation Voltage-  
:  $V_{CE(sat)} = 1.5V(\text{Max.}) @ I_C = 5A$

APPLICATIONS

- Designed for 40~60W audio amplifier power output applications.

ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ C$ )

SYMBOL	PARAMETER	MAX	UNIT
$V_{CBO}$	Collector-Base Voltage	150	V
$V_{CEO}$	Collector-Emitter Voltage	100	V
$V_{EBO}$	Emitter-Base Voltage	6	V
$I_C$	Collector Current-Continuous	7	A
$I_{CM}$	Collector Current-Peak	12	A
$I_B$	Base Current-Continuous	2	A
$P_C$	Collector Power Dissipation @ $T_C=25^\circ C$	60	W
$T_j$	Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ C$

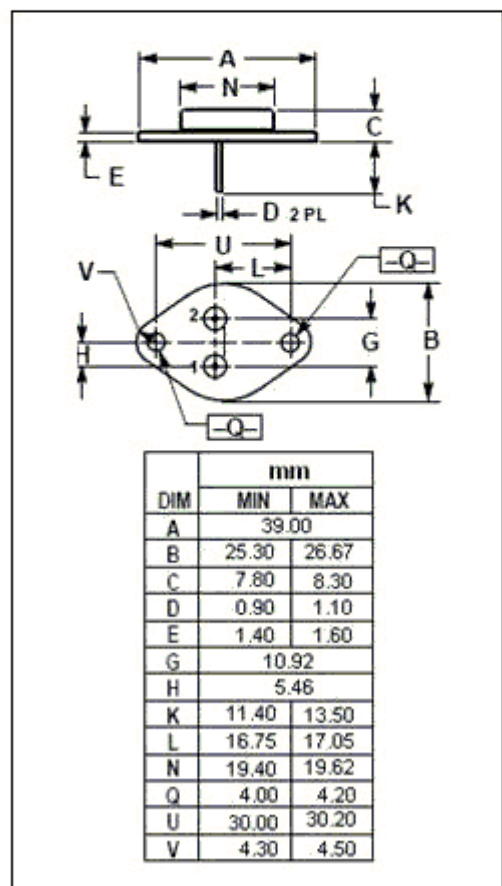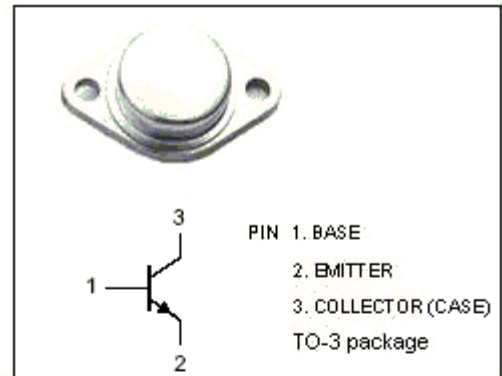

**isc Silicon NPN Power Transistor****2SD581****ELECTRICAL CHARACTERISTICS** $T_C=25^{\circ}\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=50\text{mA}; R_{BE}=\infty$	100			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E=5\text{mA}; I_C=0$	6			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=5\text{A}; I_B=0.5\text{A}$			1.5	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C=1\text{A}; V_{CE}=5\text{V}$			1.5	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB}=120\text{V}; I_E=0$			10	$\mu\text{A}$
$h_{FE-1}$	DC Current Gain	$I_C=1\text{A}; V_{CE}=5\text{V}$	60		200	
$h_{FE-2}$	DC Current Gain	$I_C=5\text{A}; V_{CE}=5\text{V}$	25			

◆  **$h_{FE-1}$  Classifications**

B	C
60-120	100-200