

SILICON DIFFUSED TYPE
FAST RECOVERY RECTIFIER


3(B, G, J)H41

○ HIGH SPEED RECTIFIER APPLICATIONS. (FAST RECOVERY)

- Average Forward Current : $I_F(AV) = 3.0A$
- Repetitive Peak Reverse Voltage : $V_{RRM} = 100 \sim 600V$
- Reverse Recovery Time : $t_{rr} = 1.5\mu s$

MAXIMUM RATING

CHARACTERISTIC	SYMBOL	RATING	UNIT
Repetitive Peak Reverse Voltage	3BH41	100	V
	3GH41	400	
	3JH41	600	
Average Forward Current	$I_F(AV)$	3.0	A
Peak One Cycle Surge Forward Current (Non Repetitive)	I_{FSM}	140	A
Junction Temperature	T_j	-40~150	°C
Storage Temperature Range	T_{sig}	-40~150	°C

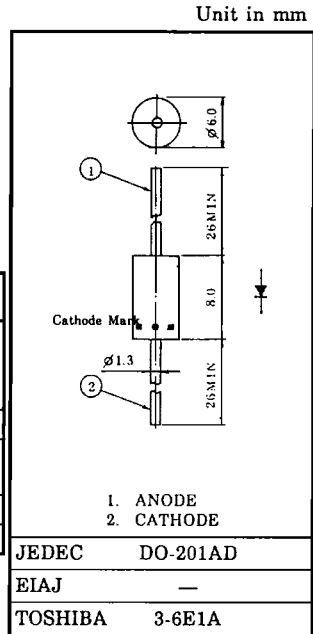


Weight : 1.18g

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Peak Forward Voltage	V_{FM}	$I_{FM} = 3.0A$	—	—	1.2	V
Repetitive Peak Reverse Current	I_{RRM}	$V_{RRM} = \text{Rated}$	—	—	10	μA
Reverse Recovery Time	t_{rr}	$I_F = 20mA, I_R = 1mA$	—	—	1.5	μs

MARKING

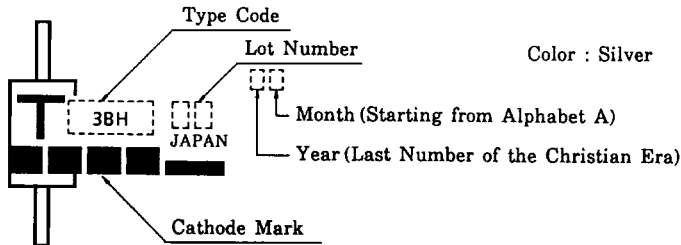

CODE	TYPE
3BH	3BH41
3GH	3GH41
3JH	3JH41

