



LA5602

Low-Dropout Voltage Regulator with Reset and On-Off Function

Overview

The LA5602 incorporates both a 5.0V voltage regulator function and reset generator function into a single-chip for micro controller power supply application. The LA5602 supports improvements in efficiency and set compactness by permitting operation at low input-output voltage differences.

Functions

- Low dropout regulator with 350mA and 5.0V output
- Power supply reset generator function
- Supports on-off control of 5V using equipped enable pin (high active)



Features

- Low minimal input-output voltage difference (0.5V typ.)
- Supports setting of reset output delay time using external capacitor
- Built-in fold back current limiting circuit and excessive heat protection circuit
- Reset output using active pull-up for simpler noise reduction

Package Dimensions

unit : mm

3075-SIP7H

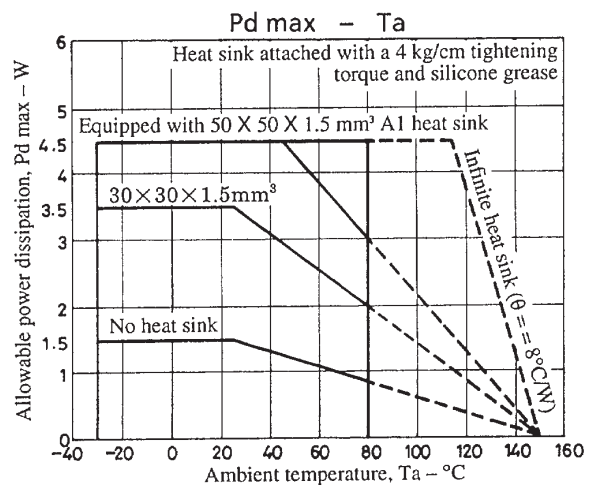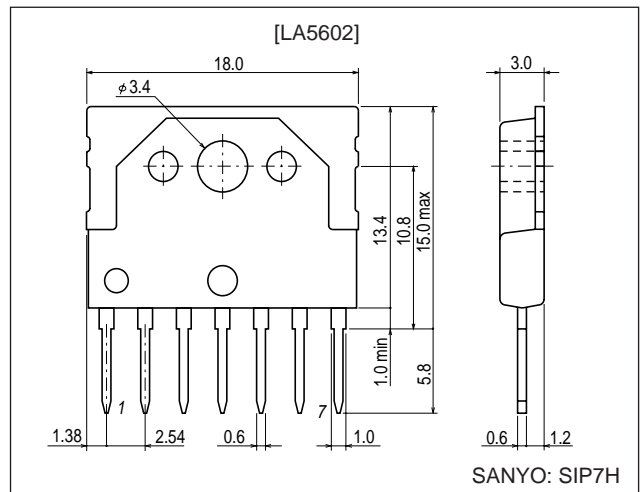

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

LA5602

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum input voltage	$V_{IN\ max}$		18	V
Enable pin voltage	$V_{EN\ max}$		$V_{IN\ max}$	V
Reset output pin voltage	$V_{RES\ max}$		18	V
Allowable power dissipation	$P_d\ max$		1.5	W
Operating temperature	T_{opg}		-30 to +80	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Input voltage	V_{IN}		5.6 to 17	V
Output current	I_{OUT}		0 to 350	mA
Reset output source current	I_{ORH}		0 to 200	μA
Reset output synch current	I_{ORL}		0 to 2	mA


Operating Characteristics at $T_a = 25^\circ\text{C}$, $V_{IN} = 8\text{ V}$, $I_{OUT} = 350\text{ mA}$, $C_{OUT} = 47\mu\text{F}$, according to specified Test Circuit

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
[Power Supply Section]						
Output voltage	V_{OUT}		4.75	5.0	5.25	V
Drop-out voltage	V_{DROP}			0.5	1.0	V
Line regulation	ΔV_{OLN}	$5.6 \leq V_{IN} \leq 17\text{V}$		20	100	mV
Load regulation	ΔV_{OLD}	$5\text{mA} \leq I_O \leq 350\text{mA}$		50	150	mV
Peak output current	I_{OP}		350	500		mA
Output short current	I_{OSC}			100	400	mA
Current dissipation	I_{Q1}	$I_{OUT} = 0$		2.1	4	mA
	I_{Q2}			10	50	mA
Output noise voltage	V_{N5}	$10\text{Hz} \leq f \leq 100\text{kHz}$		70		μV_{rms}
Temperature coefficient of output voltage	$\Delta V_O / \Delta T_a$	$T_j = 25\text{ to }125^\circ\text{C}$		1.6		$\text{mV}/^\circ\text{C}$
Ripple rejection	R_{ref}	$f = 120\text{Hz}$, $6\text{V} \leq V_{IN} \leq 17\text{V}$		60		dB
Output on-control voltage	V_{ENH}		2.6			V
Output off-control voltage	V_{ENL}				1.0	V
Low output voltage	$V_{O\ OFF}$				0.3	V
[Reset Section]						
High reset output voltage	V_{ORH}	$I_{ORH} = 200\mu\text{A}$, Cd pin open	4.73	4.98	5.23	V
Low reset output voltage	V_{ORL}	$I_{SRL} = 2\text{mA}$, Cd - GND shorted		100	200	mV
Reset threshold voltage	V_{RT}		3.95	4.2	4.45	V
Reset hysteresis voltage	V_{hys}		50	100	200	mV
Reset output delay time	t_d	$C_d = 0.1\mu\text{F}$	7.5	10	12.5	ms

LA5602


Equivalent Circuit Block Diagram

Unit (resistance: Ω)

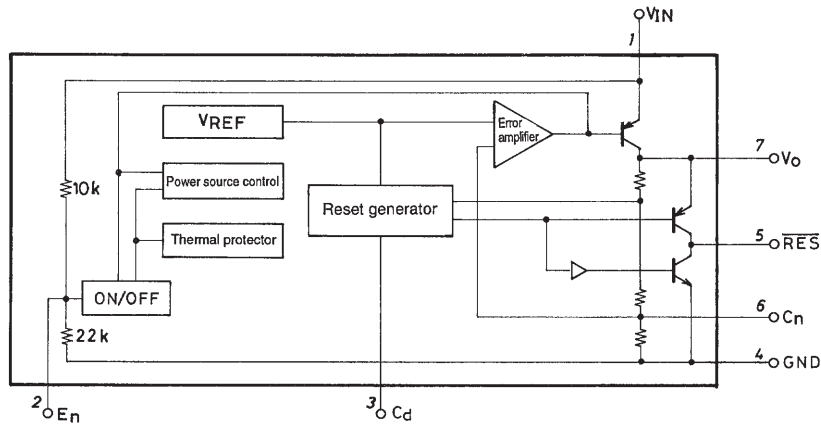


Specified Test Circuit

Unit (capacitance: F)

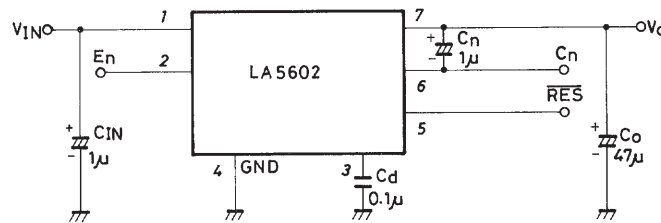

Application Circuit Example

Unit (capacitance: F)

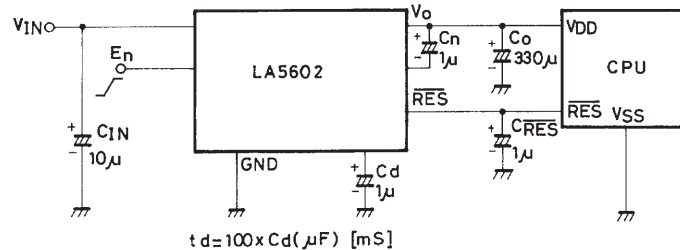


- Notes:
- 1) Capacitors C_n and $C_{\overline{RES}}$ are only required if problems are experienced with noise from external sources. If capacitor C_n is present, ensure that C_o is at least more than one-third of the value of C_{in} in order to prevent output noise at power-down due to capacitor discharge timing.
 - 2) Use a low temperature coefficient capacitor for the delay time capacitor C_d .
 - 3) The minimum recommended value of output capacitor C_o is $47\mu F$.


Function Table

V_{IN}	V_O
L	L
H	H

* V_{EN} = high or open










Enable Input Equivalent Circuit

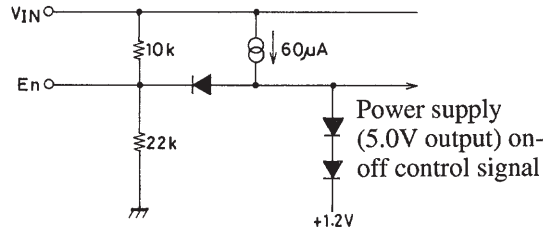

Unit (resistance: Ω)

Reset Operation

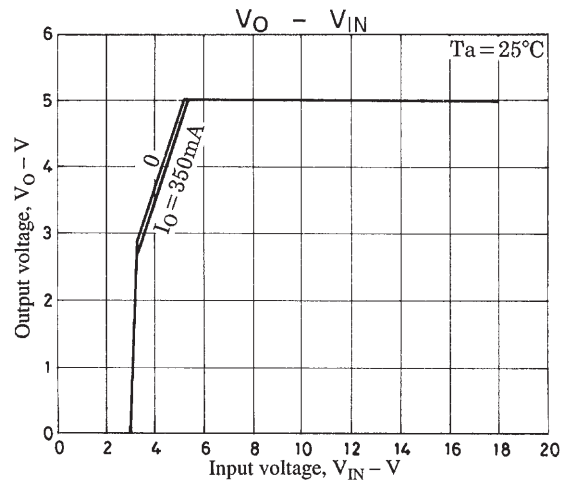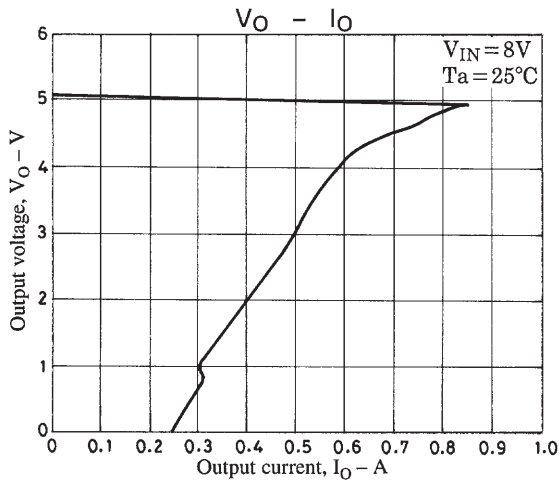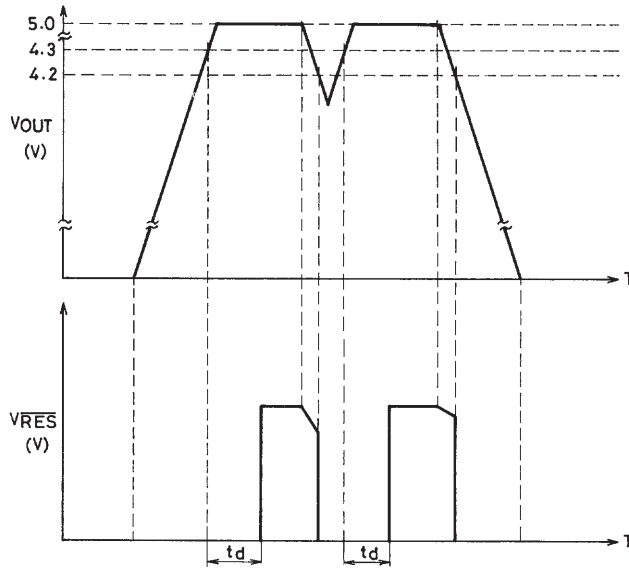

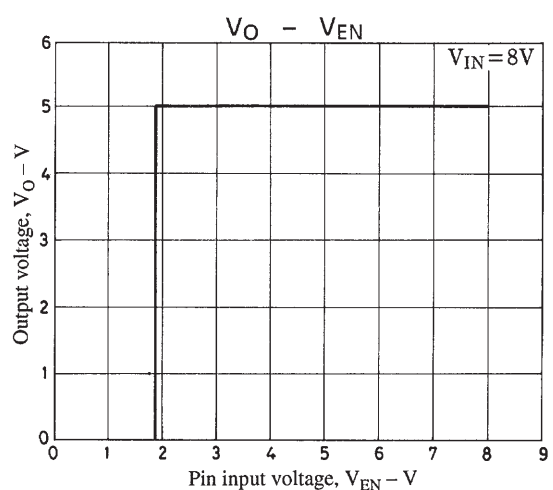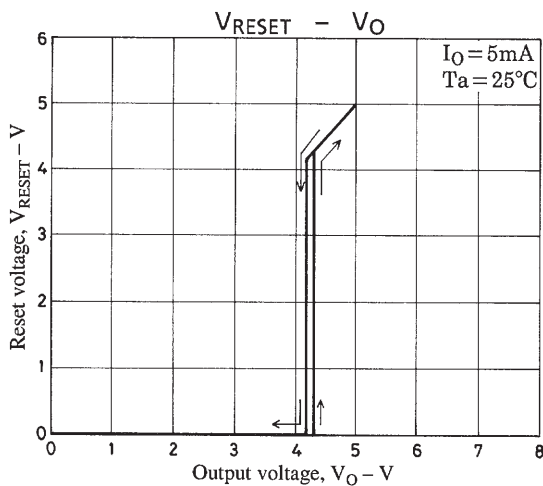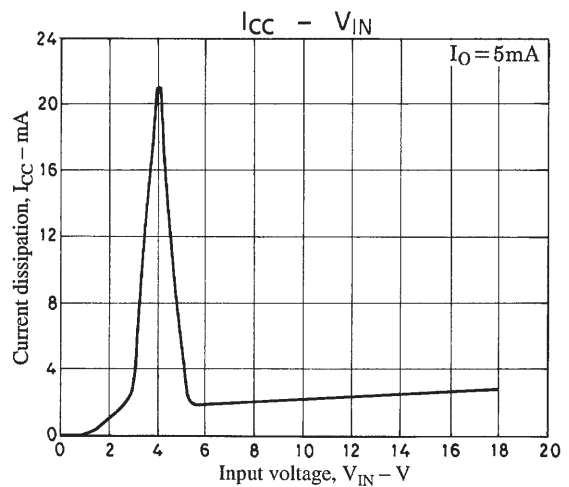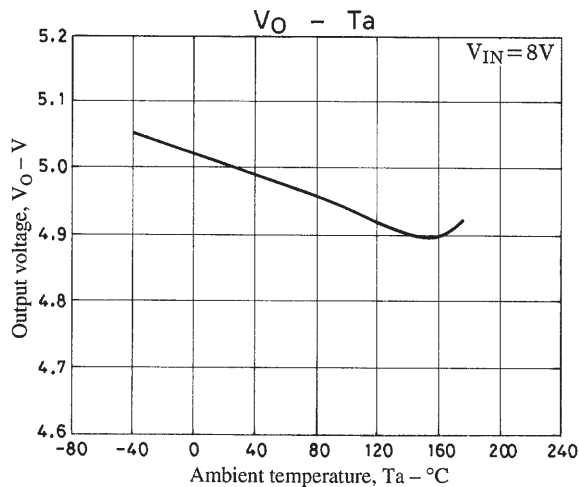

■ Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of December, 1999. Specifications and information herein are subject to change without notice.