


**SF20JC10**

**100V 20A**

### OUTLINE DIMENSIONS

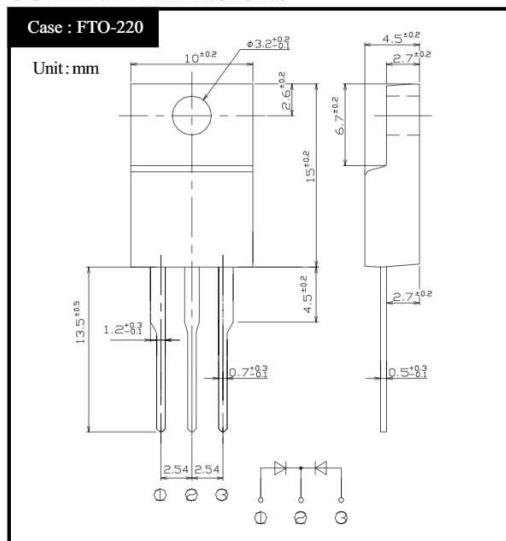

### RATINGS


#### ● Absolute Maximum Ratings ( If not specified, Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55~150	°C
Operating Junction Temperature	Tj		150	°C
Maximum Reverse Voltage	V <sub>RM</sub>		100	V
Average Rectified Forward Current	I <sub>o</sub>	50Hz sine wave, R-load, Rating for each diode I <sub>o</sub> /2, T <sub>c</sub> =114°C	20	A
Peak Surge Forward Current	I <sub>PSM</sub>	50Hz sine wave, Non-repetitive 1 cycle peak value, T <sub>j</sub> =25°C	200	A
Dielectric Strength	V <sub>dis</sub>	Terminals to case, AC 1 minute	2.0	kV
Mounting Torque	T <sub>OR</sub>	(Recommended torque : 0.3N·m)	0.5	N·m


#### ● Electrical Characteristics ( If not specified, Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =10A, Pulse measurement, Rating of per diode	Max 0.86	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =V <sub>RM</sub> , Pulse measurement, Rating of per diode	Max 0.7	mA
Junction Capacitance	C <sub>j</sub>	f=1MHz, V <sub>R</sub> =10V, Rating of per diode	Typ 260	pF
Thermal Resistance	θ <sub>jc</sub>	junction to case	Max 2.0	°C/W



## SF20JC10 Forward Voltage

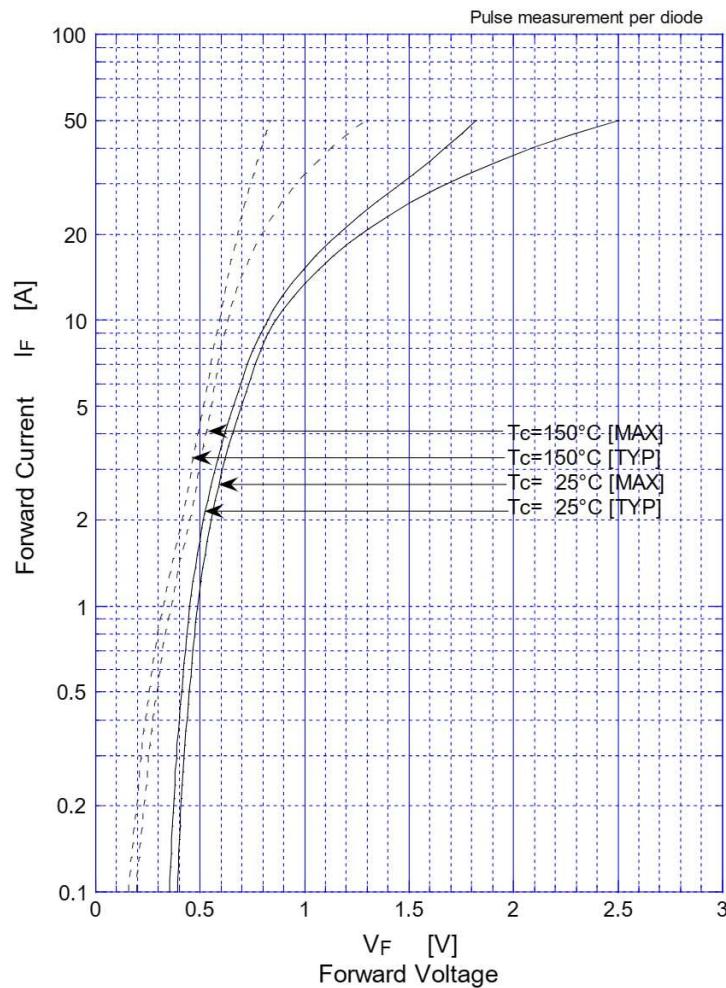



## SF20JC10 Reverse Voltage

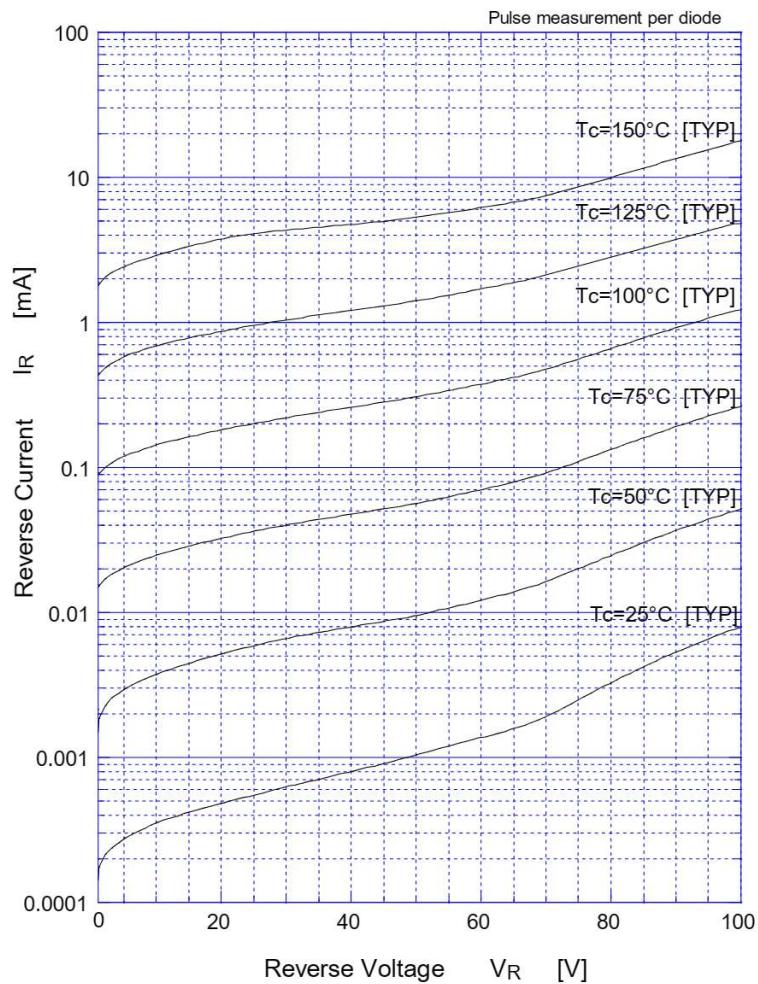

SF20JC10 Forward Power Dissipation

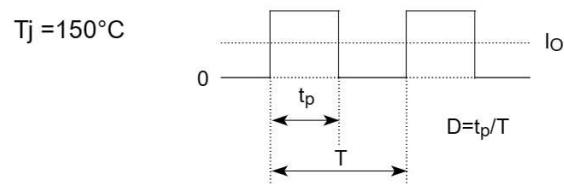
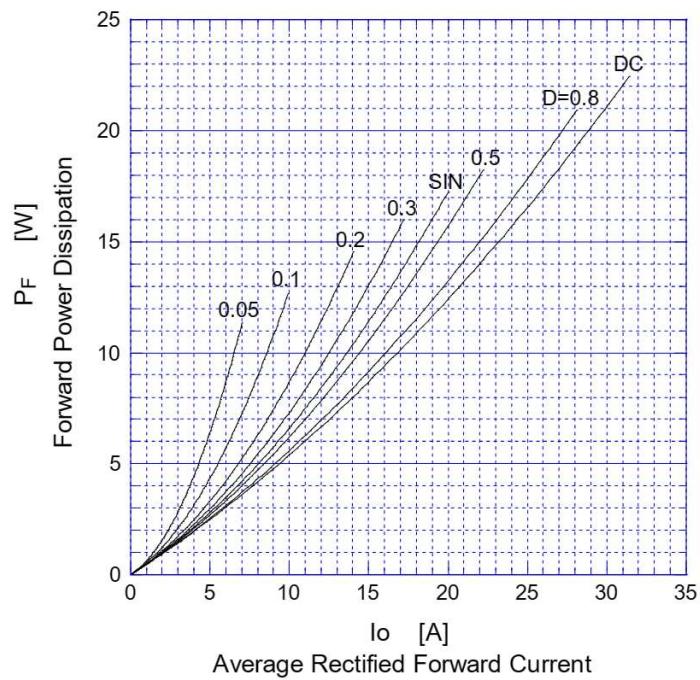


SF20JC10 Reverse Power Dissipation

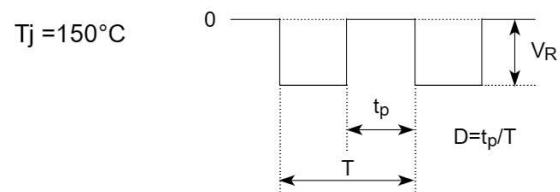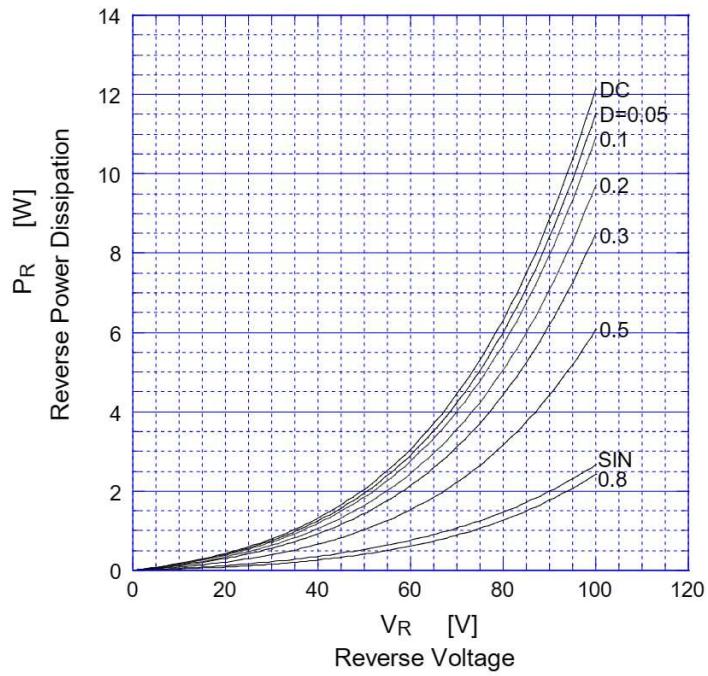


SF20JC10

Derating Curve

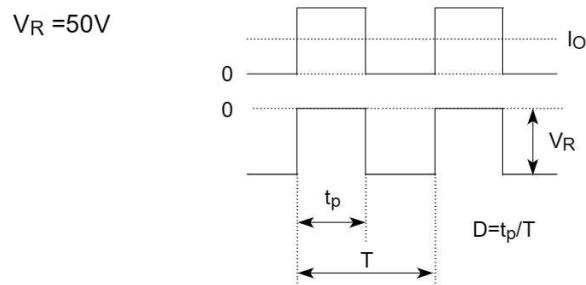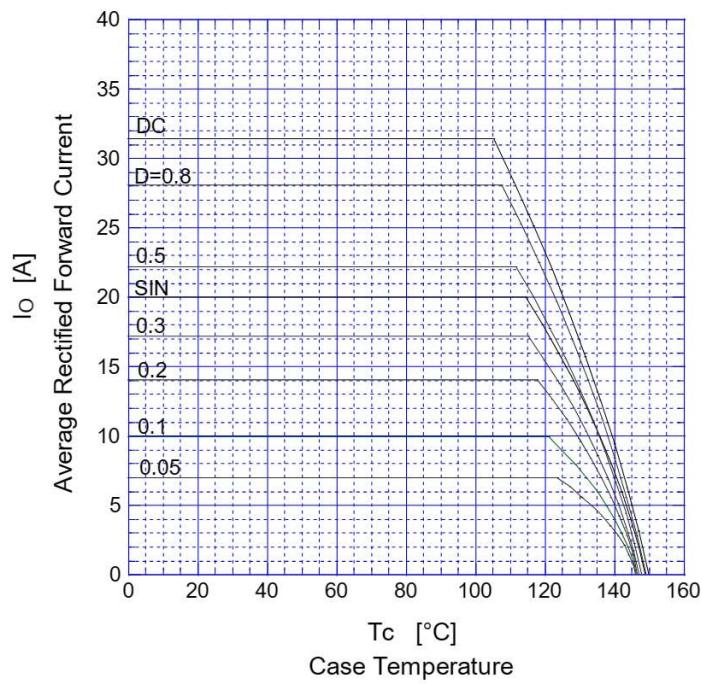

## SF20JC10 Peak Surge Forward Capability

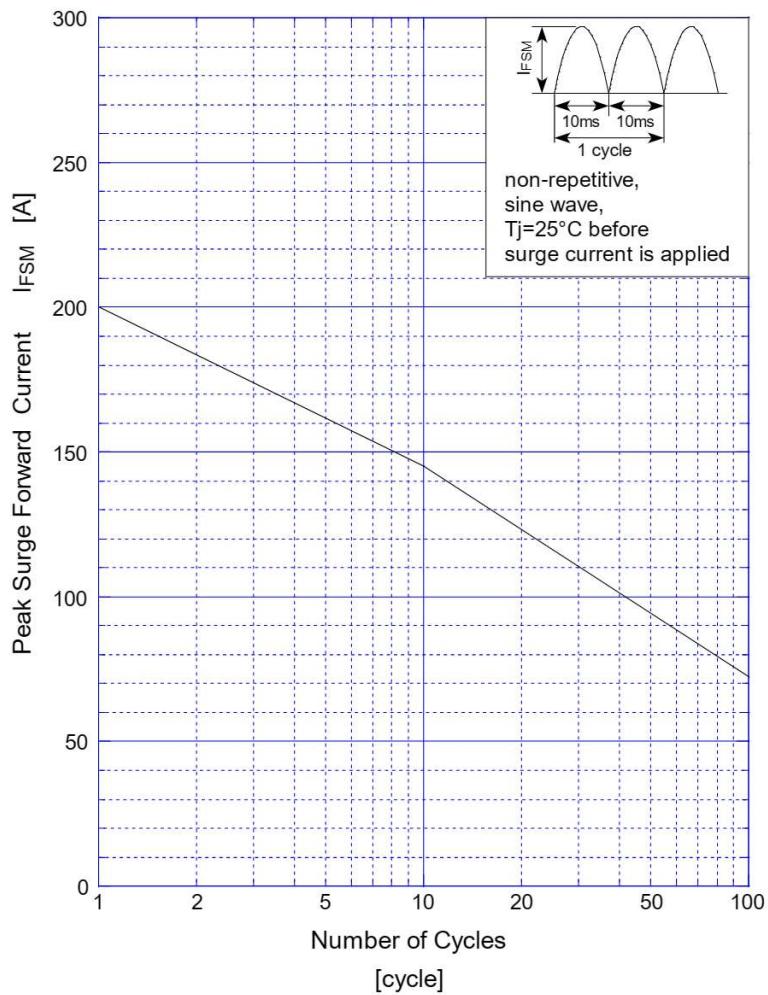

SF20JC10 Junction Capacitance

